

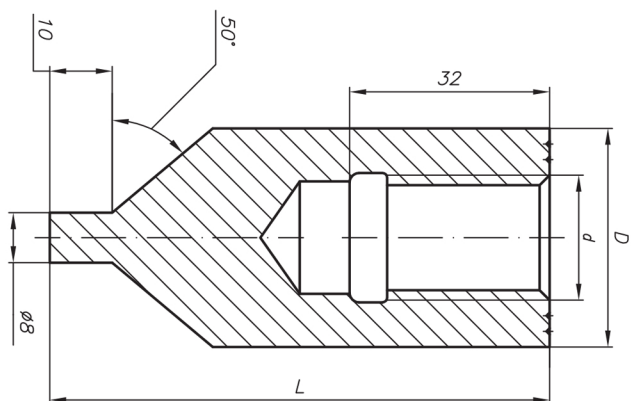
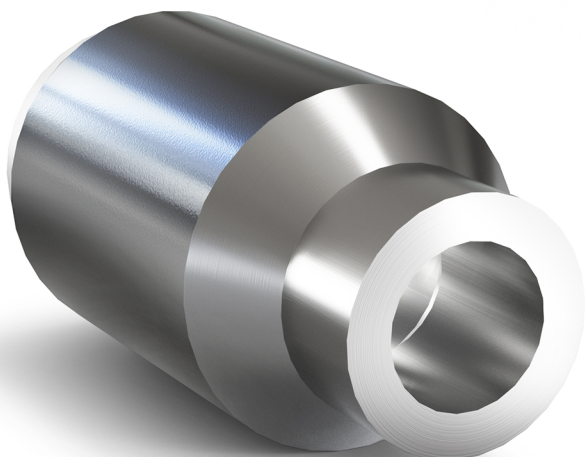


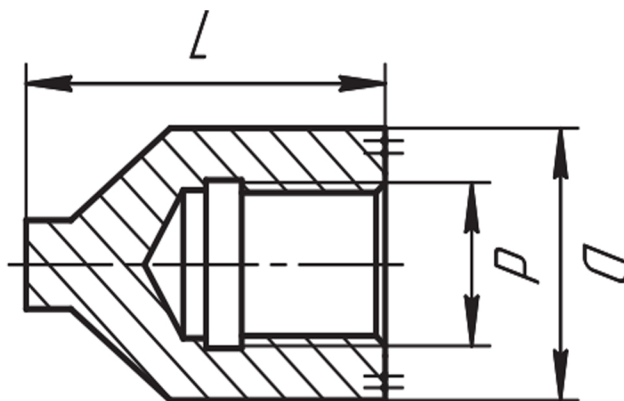

Обозначение	Размеры, мм			Материал	Масса, кг
	d	D	L		
P = 19,62 МПа, t = 290°C; P = 17,66 МПа, t = 360°C; P = 9,02 МПа, t = 290°C; P = 3,92 МПа, t = 290°C.					
01 OCT 24.125.22-89	M20x1,5	35	80	08X18H10T ГОСТ 5949	0,42
02 OCT 24.125.22-89			110		0,66
03 OCT 24.125.22-89	M22x1,5		80		0,48
04 OCT 24.125.22-89			110		0,66
05 OCT 24.125.22-89	M27x2	44	80		0,42
06 OCT 24.125.22-89			110		0,79
07 OCT 24.125.22-89	M27x1,5		80		0,42
08 OCT 24.125.22-89			110		0,79
09 OCT 24.125.22-89	M33x2	56	80		0,93
10 OCT 24.125.22-89			110		1,3

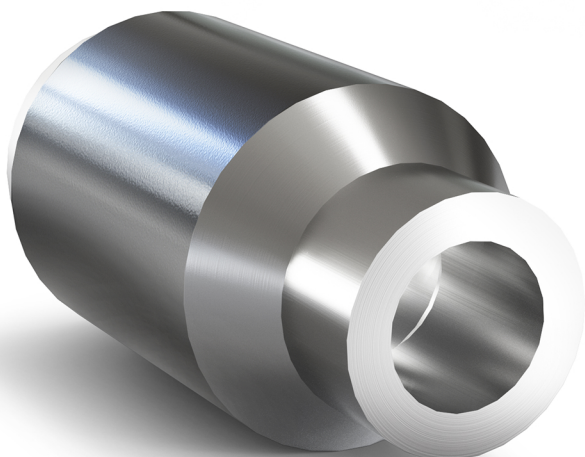

Обозначение	Размеры, мм			Материал	Масса, кг
	d	D	L		
P = 11,77 МПа, t = 250°C; P = 8,44 МПа, t = 300°C; P = 5,89 МПа, t = 275°C; P = 3,92 МПа, t = 200°C.					
01 ОСТ 24.125.57-89	M20x1,5	34	80	Сталь 20	0,35
02 ОСТ 24.125.57-89			110		0,56
03 ОСТ 24.125.57-89	M27x2	44	80		0,54
04 ОСТ 24.125.57-89			110		0,81
05 ОСТ 24.125.57-89	M33x2	55	80		0,82
06 ОСТ 24.125.57-89			110		1,25
07 ОСТ 24.125.57-89	M39x2	78	80		1,63
08 ОСТ 24.125.57-89			110		1,95